


# CYBEX™ SECURE MULTI-DOMAIN SMART CARD READER

## SCMDR0001



### Quick Installation Guide

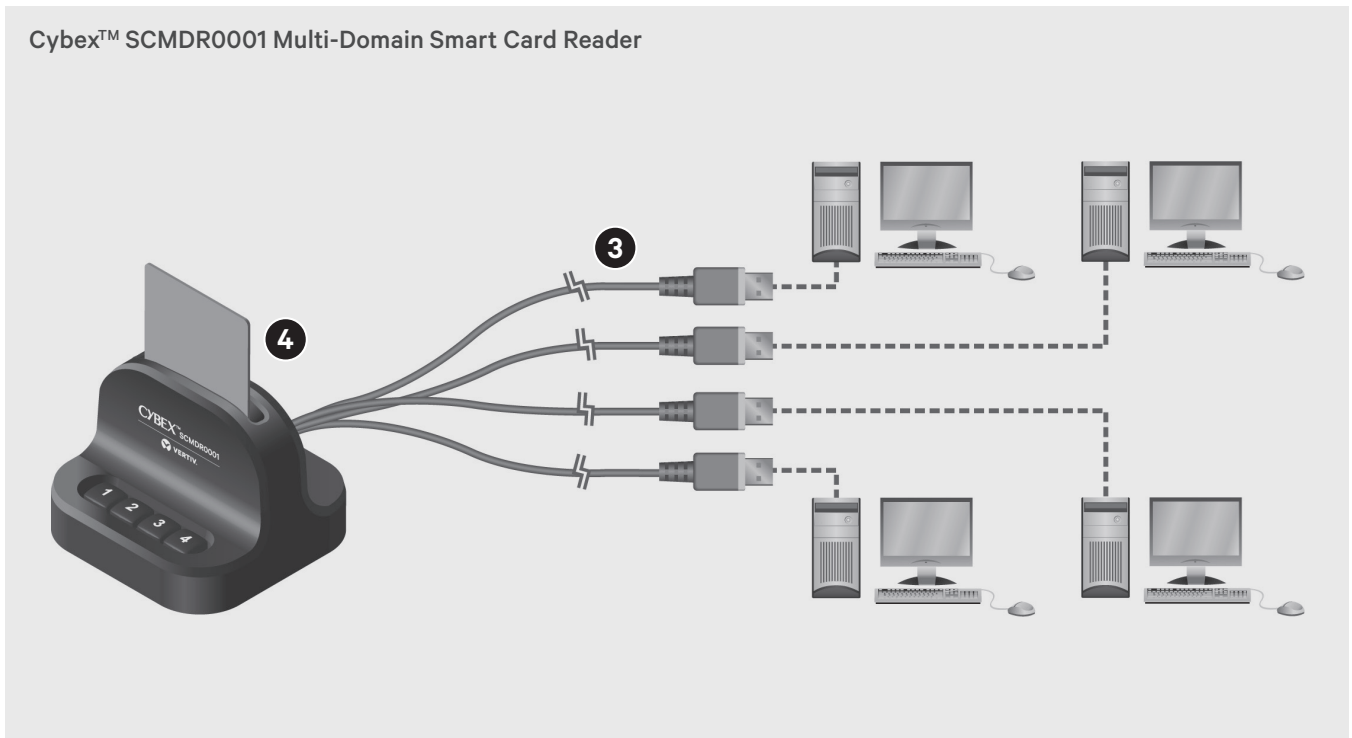

Prior to installation, use a standard smart card reader to verify your smart card works correctly.

#### 1. Turning on your PCs

Ensure all connected PCs are turned on.

#### 2. Connecting power

Using an appropriate wall-socket adaptor, plug in the provided power adaptor into the smart card reader and plug the other end into a wall outlet. When power is supplied, the smart card reader beeps for one second and all LEDs blink once.

#### 3. Connecting to your PCs

Connect a USB cable from your smart card reader to each PC. Cable numbers correspond to the numbered buttons on the smart card reader. When connected, all PC number LEDs blink continually.

#### 4. Inserting your smart card

With the chip facing toward you, insert your smart card into the slot on the smart card reader. When the card is inserted, the smart card reader beeps for one second and all LEDs turn off.

#### 5. Initializing your smart card reader

Press PC button 1 to initialize the smart card reader on PC #1. The LED for button 1 blinks for five seconds and then turns solid. The smart card appears in the device manager of the first PC.

Repeat for PC buttons 2-4.

**NOTE:** When selecting a different PC, the smart card reader disappears from the device manager of the previous PC and appears under the device manager of the selected PC.

#### 6. Using the smart card reader

To associate the smart card with another PC, press the appropriate PC button on the smart card reader. The smart card disconnects from the previous PC and connects to the selected PC.

**NOTE:** Removing the smart card from its reader immediately disassociates the smart card and the reader from all connected PCs. Smart card aware applications notice the absence of the smart card and respond accordingly.

#### 7. Using the reader after smart card removal

To use a smart card after it has been removed from a reader, repeat steps 4 and 5 to reinitialize the reader with all connected PCs.



**To contact Vertiv Technical Support: visit [www.Vertiv.com](http://www.Vertiv.com)**

© 2020 Vertiv Group Corp. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

